

TEXTILES

Seating / Chaises
Stock - Grades 1 & 2

03

03

artopex®

Essentials
Grade 1

Dillon



Black
DL99



Graphite
DL69



Stratus
DL03



Steel
DL05

Hathaway



Onyx
HT99



Smoky
HT69



Nickel
HT05



Fog
HT03

Oasis



Infinity
OA92



Carbon
OA83



Coin
OA82



Arctic
OA47

Frequency



Cadet
FQ81




Smokescreen
FQ82




Navy
FQ41


Genesis

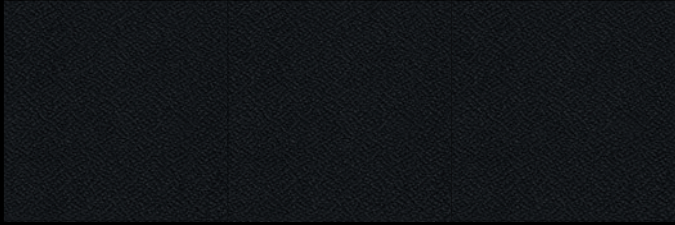

Flint
GE93



Carbon
GE84



Moonwalk
GE82



Eclipse
GE46




Cinder
GE83

Inspiration Grade 2

Cloud Nine



Dijon
CL25



Rose Grenat
CL30



Flamenco
CL35



Coral
CL75



Aubergine
CL37



Rose
CL36



Iris
CL38



Pluto
CL40



Space
CL42



Galaxy
CL49




Frost
CL41



Artesian
CL53



Charcoal
CL86



Argent
CL85



Poplar
CL18



Angora
CL16

Crosslink



Espresso
CK74



Rosewood
CK18



Alabaster
CK17



Midnight
CK41



Cornflower
CK42

SPECIFICATION / SPÉCIFICATIONS	DILLON	HATHAWAY	OASIS	FREQUENCY
Composition	100% Polyurethane	100% PVC Vinyl	65% Recyc. Polyester 35% Polyester	65% Recyc. Polyester, 35% Polyester
Backing / Dos	70% Polyester, 30% Cotton	85% Polyester, 15% Cotton	Nvirosoft acrylic	Nvirosoft acrylic
Weight-linear yard / Poids-verge linéaire	20.16 oz	32.12 oz	10.0 oz	10.0 oz
Flammability / Inflammabilité	CA - Tech. bull. 117-2013, UFAC Class 1, MVSS 302, NFPA 260 Class 1	CA - Tech. bull. 117-2013, UFAC Class 1, NFPA 260 Class 1	CA - Tech. bull. 117-2013	CA - Tech. bull. 117-2013
Seam slippage ASTM D4034 / Résistance des coutures ASTM D4034	Warp: 92 lbs Fill: 77 lbs	Warp: 44 lbs Fill: 53 lbs	Warp : 76 lbs Fill : 66 lbs	Warp : 79 lbs Fill : 65 lbs
Tensile strength ASTM D5034 / Résistance à la rupture ASTM D5034	Warp: 112 lbs Fill: 70 lbs	Warp: 106 lbs Fill: 110 lbs	Warp : 157 lbs Fill : 194 lbs	Warp : 172 lbs Fill : 254 lbs
Color fastness to crocking AATCC 8 / Résistance au dégorgeement AATCC 8	Dry / Sec : Class 4 Wet / Humide : Class 4	Dry / Sec : Class 4 Wet / Humide : Class 4	Dry / Sec : Class 5 Wet / Humide : Class 5	Dry / Sec : Class 5 Wet / Humide : Class 5
Color fastness to light AATCC 16 Résistance à la lumière AATCC 16	Class 4 / 200 hrs min.	Class 4 / 200 hrs min.	Class 5 / 40 hrs min.	Class 5 / 40 hrs min.
Abrasion resistance ASTM D4157 / Résistance à l'abrasion ASTM D4157	200,000+ D.R. / D.F.	100,000 D.R. / D.F.	250,000+ D.R. / D.F.	50,000+ D.R. / D.F.
Treatment / Traitement	Antimicrobial / Antimicrobien	Antimicrobial / Antimicrobien	Greenshield®	Greenshield®
Cleaning code / Nettoyage	WS	WS	WS	WS
Disinfection / Désinfection	Disinfectant, peroxide, bleach/water (20%/80%) / Désinfectant, peroxyde, javellisant/eau (20%/80%)	Disinfectant, peroxide, bleach/water (20%/80%) / Désinfectant, peroxyde, javellisant/eau (20%/80%)	Disinfectant, peroxide, bleach/water (10%/90%) / Désinfectant, peroxyde, javellisant/eau (10%/90%)	Disinfectant, peroxide, bleach/water (10%/90%) / Désinfectant, peroxyde, javellisant/eau (10%/90%)
Samples / Échantillons	Culp Contract (336) 889-5161	Culp Contract (336) 889-5161	Artopex (800) 363-3040	Artopex (800) 363-3040

SPECIFICATION / SPÉCIFICATIONS	GENESIS	CLOUD NINE	CROSSLINK
Composition	100% Recyc. Polyester Repreve Our Oceans	65% Recyc. Polyester 35% Polyester	85% Recyc. Polyester 15% Polyester
Backing / Dos	Nvirosoft acrylic	Nvirosoft acrylic	Nvirosoft acrylic
Weight-linear yard / Poids-verge linéaire	13.0 oz	15.0 oz	15.0 oz
Flammability / Inflammabilité	CA - Tech. bull. 117-2013	CA - Tech. bull. 117-2013	CA - Tech. bull. 117-2013
Seam slippage ASTM D4034 / Résistance des coutures ASTM D4034	Warp: 90 lbs Fill: 79 lbs	Warp: 64 lbs Fill: 77 lbs	Warp : 97 lbs Fill : 48 lbs
Tensile strength ASTM D5034 / Résistance à la rupture ASTM D5034	Warp: 304 lbs Fill: 265 lbs	Warp: 137 lbs Fill: 327 lbs	Warp : 284 lbs Fill : 242 lbs
Color fastness to crocking AATCC / Résistance au dégorgeement AATCC 8	Dry / Sec : Class 4.5 Wet / Humide : Class 5	Dry / Sec : Class 4.5 Wet / Humide : Class 5	Dry / Sec : Class 4.5 Wet / Humide : Class 5
Color fastness to light AATCC 16 Résistance à la lumière AATCC 16	Class 4-5 / 40 hrs min.	Class 4-5 / 40 hrs min.	Class 4-5 / 40 hrs min.
Abrasion resistance ASTM D4157 / Résistance à l'abrasion ASTM D4157	500,000+ D.R. / D.F.	200,000+ D.R. / D.F.	100,000 D.R. / D.F.
Treatment / Traitement	Greenshield®	Greenshield®	Greenshield®
Cleaning code / Nettoyage	WS	WS	WS
Samples / Échantillons	Artopex (800) 363-3040	Artopex (800) 363-3040	Artopex (800) 363-3040